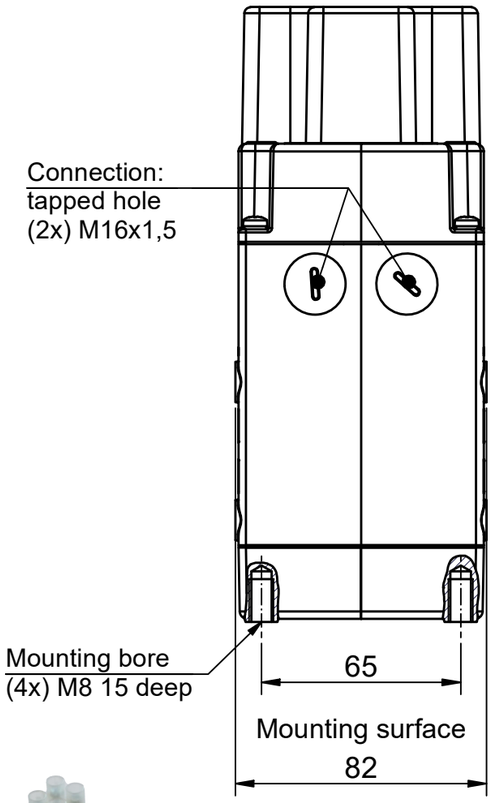

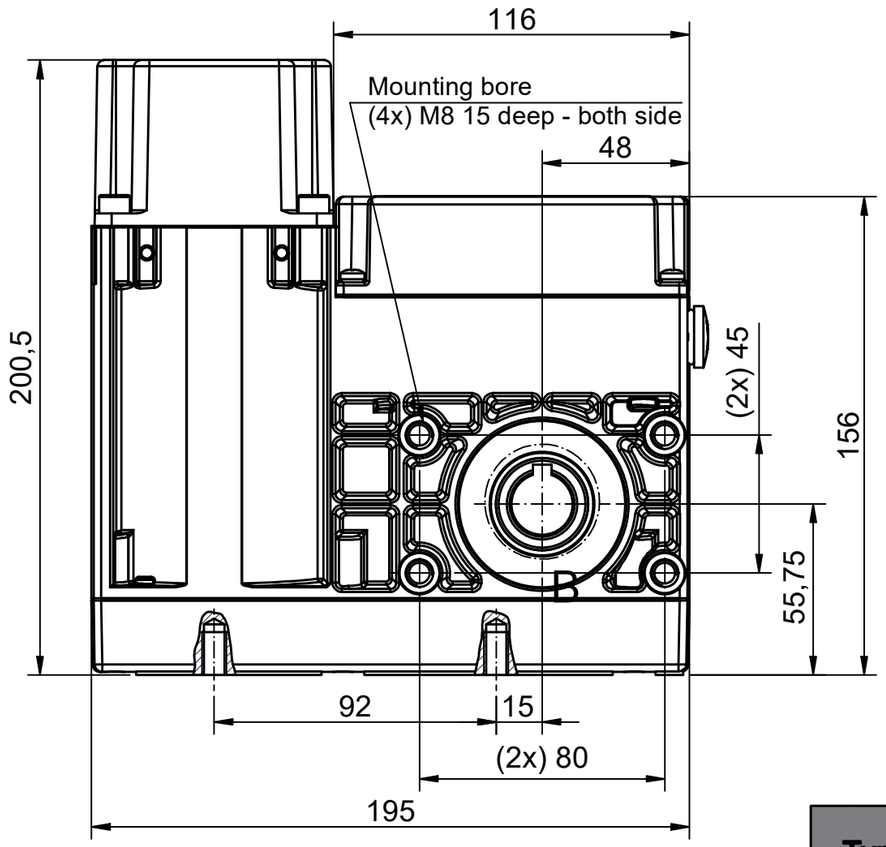

Configuration	
Description	Property value
Type	Compacta MR 6
Mains	Direct current
Supply voltage	24 V DC
Supply connection	24 V DC
Output speed rpm	9 min-1
Output torque in Nm / Duty cycle (ED) in %	30,5 Nm / 20%
Self locking	static
Ratio	200 : 1
Lubrication	Mobilube 1 SHC 75W90
max. Limit switch range	46 revolutions on output
Protection class	IP65
Motor rating	0,12 kW
Current value	10,5 A

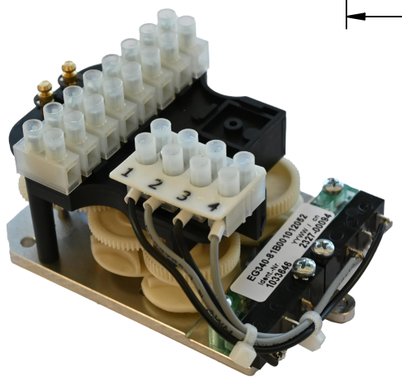



For applications with defined
End position in both directions of rotation.

Additional position signal
by rotary potentiometer.

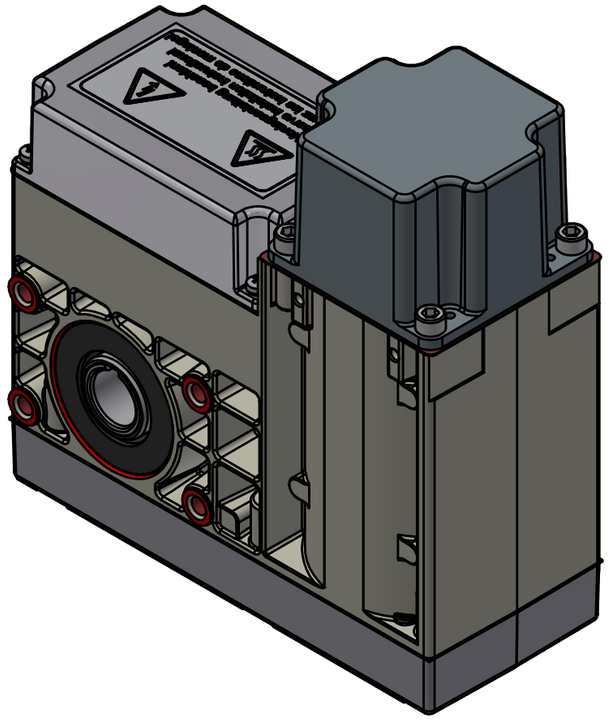

Nameplate on the inside
from gearshift cover

Typenschild
Nameplate

Detail B
Through-going hollow shaft
with keway

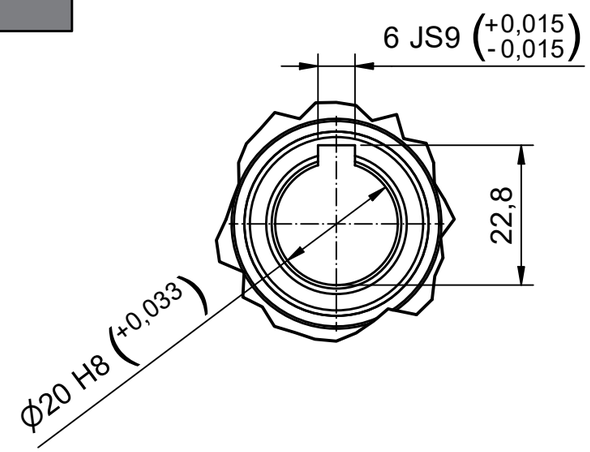

Bezeichnung / *designation*
Compacta MR6 Induction Motor
Datenblatt / technical datasheet

10000000000162435		
Artikel Nr. / article *no.* 6-07-MR-0006		
	Datum / *date*	Name / *name*
gezeichnet / *drawn*	13.10.2023	mwid

Framo Morat
Franz Morat Group
Framo Morat GmbH & Co. KG
Franz-Morat-Straße 6
D-79871 Eisenbach
www.framo-morat.com