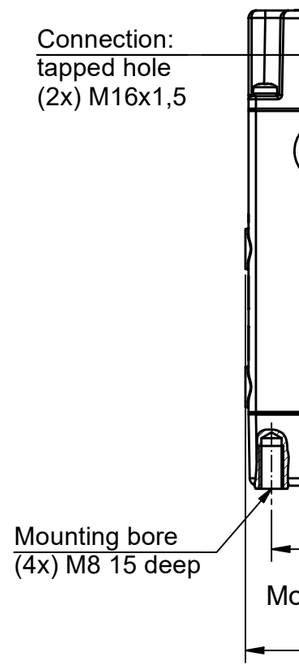

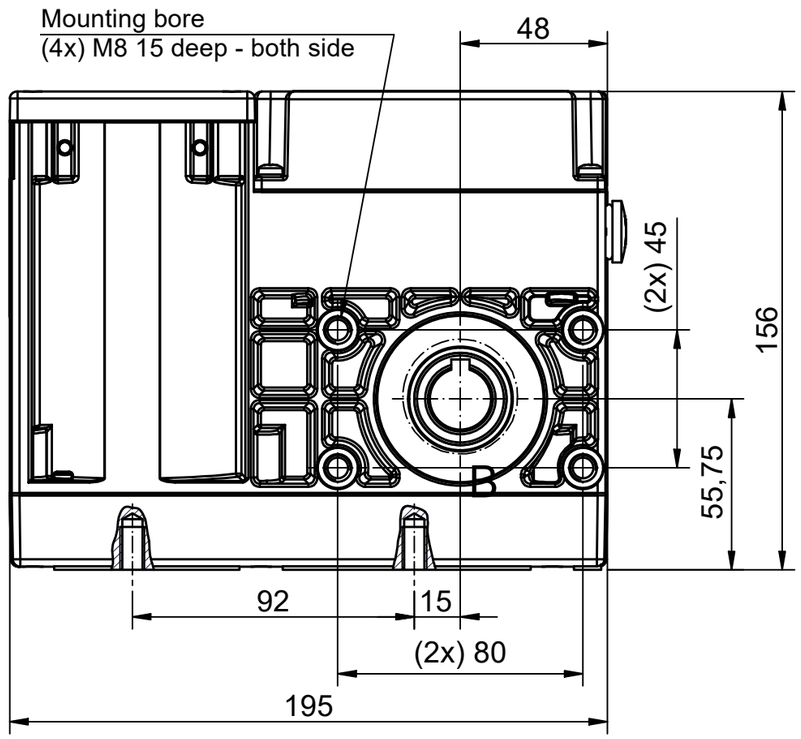

Configuration	
Description	**Property value**
Type	Compacta MR 6
Mains	Three-phase current
Mains frequency	50 Hz
Y-Connection	Yes
Supply voltage	230/400V AC
Supply connection	3 x 400V AC
Output speed rpm	54 min-1
Output torque in Nm / Duty cycle (ED) in %	19 Nm / 30%
Self locking	No
Ratio	50 : 1
Lubrication	TRIBOL 800/680
max. Limit switch range	184 revolutions on output
Protection class	IP54
Motor rating	0,22 kW
Current value	0,7 A
Equipment	
Rotary potentiometer 10 speeds 10 kOhm	

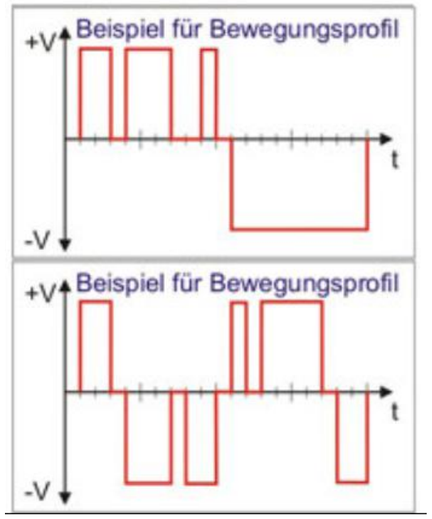

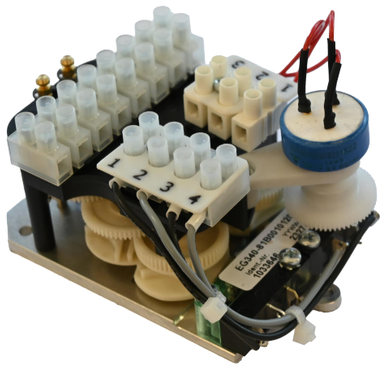

For applications with defined
End position in both directions of rotation.

Additional position signal
by rotary potentiometer.

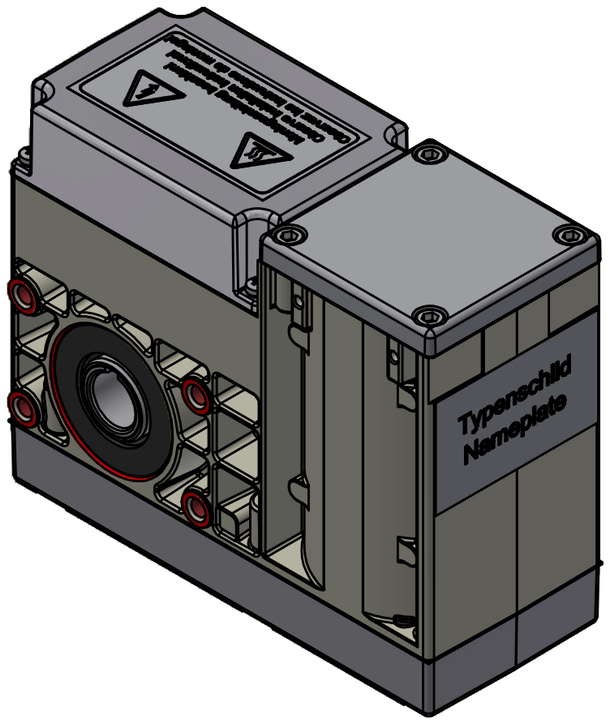

Detail B
Through-going hollow shaft
with keway

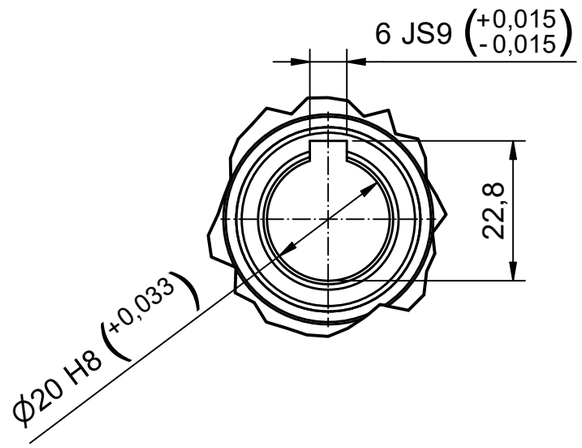

Bezeichnung / *designation*
Compacta MR6 Induction Motor
Datenblatt / technical datasheet

10000000000162406		
Artikel Nr. / article *no.* 6-07-MR-0002		
	Datum / *date*	Name / *name*
gezeichnet / *drawn*	13.10.2023	mwid

Framo Morat
Franz Morat Group
Framo Morat GmbH & Co. KG
Franz-Morat-Straße 6
D-79871 Eisenbach
www.framo-morat.com